



# SPECIFICATIONS/SECTIONS

## Rever MULTIPURPOSE double-leaf doors



### Rever MULTIPURPOSE double-leaf doors consisting of:

- Leaf of galvanised steel-sheet, filler of rigid honey-comb fibre structure, total thickness 39 mm.
- Corner frame made of profiled galvanised steel-sheet prepared for installation with brackets or bolts. The frame is supplied non-assembled.
- Standard lock in main leaf with cylinder bore and keyhole for patent keys. Secondary leaf with central manual bolts for closing at top and bottom.
- Black colour safety-shaped handle fitted at a height of approx. 1075/1125 (FM H 2050/FM H 2150) above the finished floor.
- Each leaf with 2 bearing hinges and 3 safety bolts at hinge side.
- Painted with epoxy-polyester oven-baked powder paint with anti-scratch goffered finish - light pastel turquoise for door leaves (NCS4020-B50G), and a darker shade for the frame (NCS5020-B50G). On request, powder coating in RAL or decorative NDD - Ninz Digital Decor can be applied for decorative or graphic elements. Surface treatment of the door leaves is carried out using oven-baked epoxy-polyester powder and graphic printing of the decoration on the flat side of the door leaves by means of sprayed inks. The decoration is protected by transparent varnish. The finish can be flat or beaten in accordance with the decoration selected.
- Reversible door for opening right or left with bottom frame adaptable to floor or detachable for use without bottom frame.
- All Rever doors are prepared to receive a three-point closing device (Kit Secur).

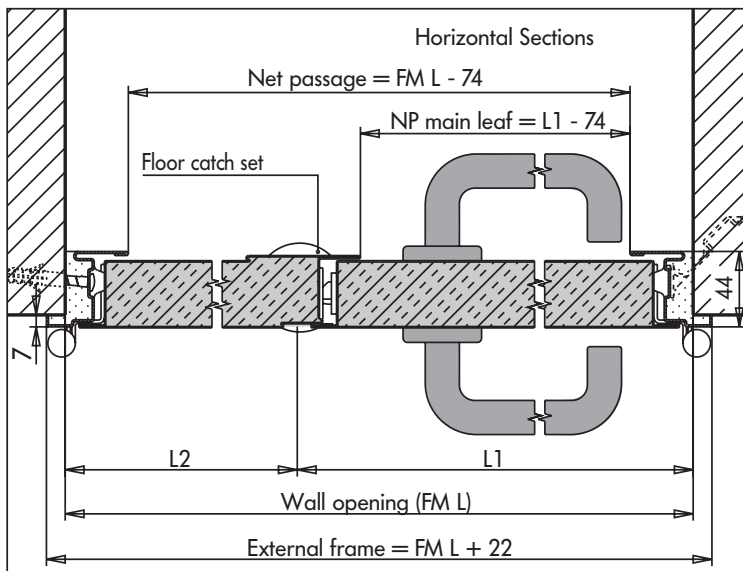
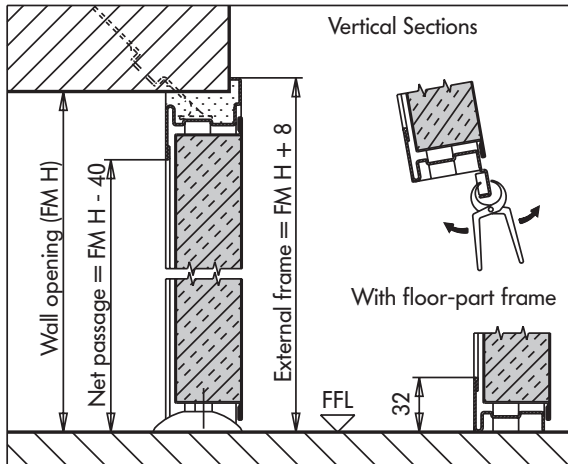


### Dimensions wall opening FM L x FM H available:



- 1200 ( 800 + 400) x 2050/2150
- 1300 ( 900 + 400) x 2050/2150
- 1400 ( 700 + 700) x 2050/2150
- 1600 ( 800 + 800) x 2050/2150
- 1800 ( 900 + 900) x 2050/2150
- 2000 ( 1000 + 1000) x 2050/2150

NB.



To request the doors can be supplied in different RAL tones, combined with anti-panic crossbars, door-closers, ventilation holes, louvers, frame extensions or special casings.

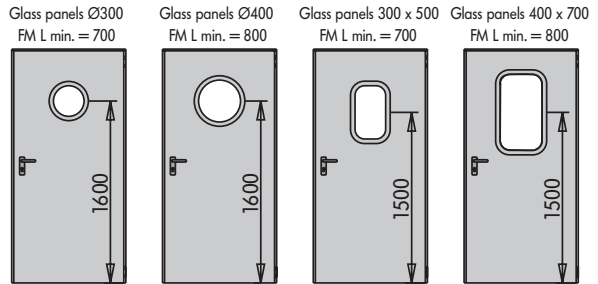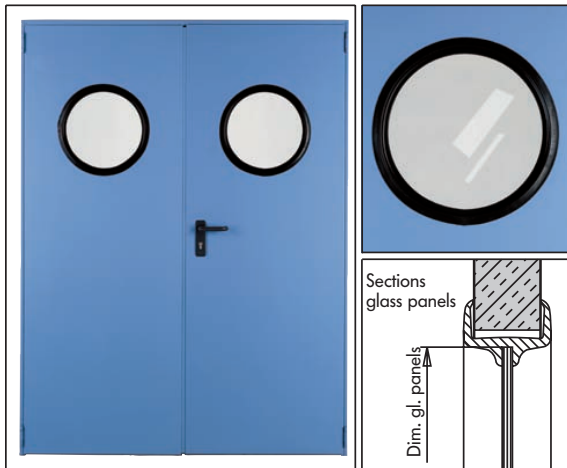

**Vision panel** for single and double leaf REVER doors made with rubber EPDM outer profile black colour and laminated 3+3 transparent safety glass. Opening direction of door necessary.

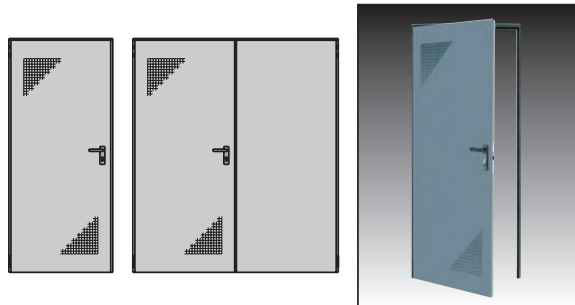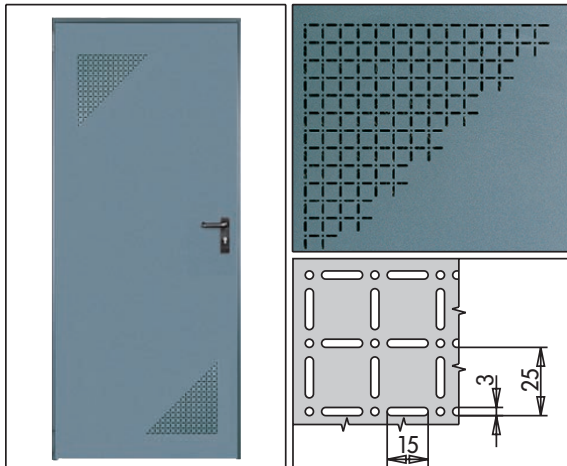

**Ventilation holes** for single and main leaf of double leaf REVER doors by sheet-holing like shown in picture, air passage approx. 200 square cm. Rever doors with ventilation holes maintain the reversibility.

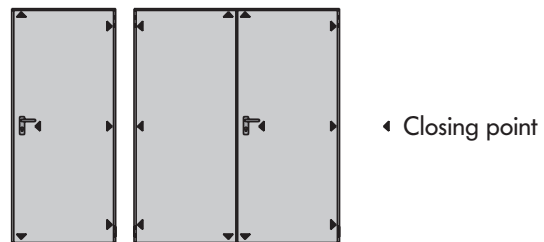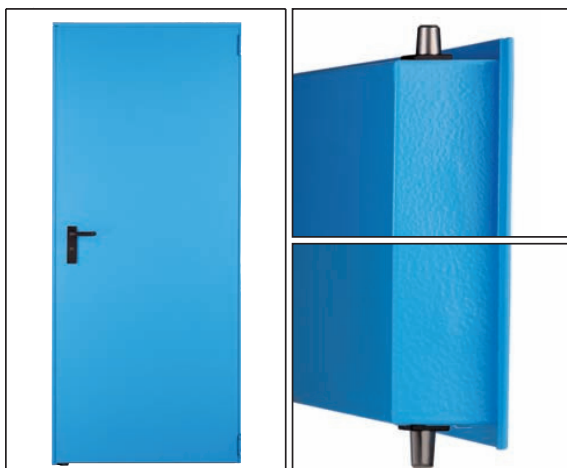

**REVER SECUR** version of single leaf door and main leaf of double leaf doors with 3 points closing lock including european cylinder. Available also in kit secur for site-installation. Rever Secur doors maintain the reversibility.

